


Thermowell TYPE LOL




With rotatable union


- Thermowells are used in containers, tanks and pipelines for installation/ replacement of sensors without having to drain or evacuate the process.
- Material for thermowell is stainless steel AISI 316L.
- Available with pressure certificate up to 75 bars.
- Immersion sheath $\varnothing 12/\varnothing 11/\varnothing 9$ with wall thickness of 1 mm.
- Rated torque: 50 Nm.

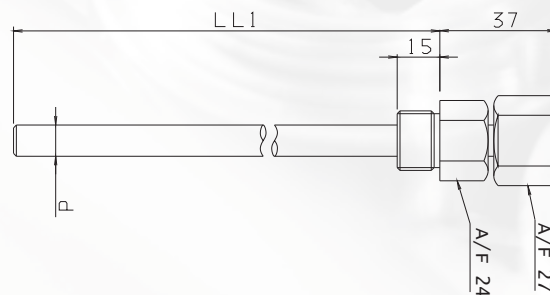

LOL thermowell immersion length = LL1




$$LL1 = L1 - 35$$

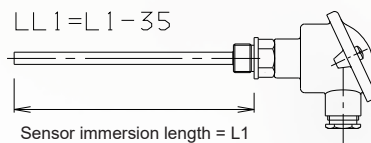

Ordering: See ordering form on back page

ORDERING FORM / THERMOWELL *

TYPE LOL

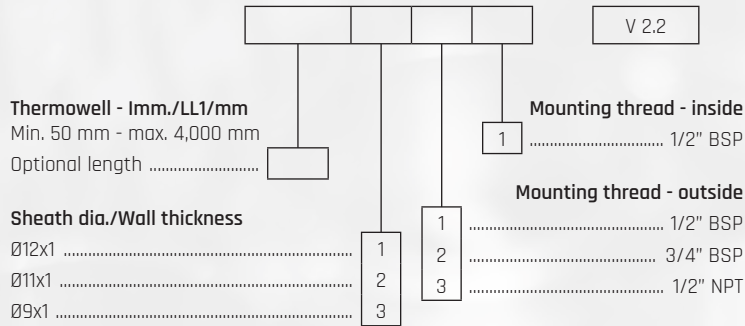

*Some configurations are unavailable. Your Senmatic sales person will notify you if you have made an incorrect selection.